



Research Article

BEHAVIOUR OF REINFORCED CONCRETE STRUCTURES SUBJECTED TO FIRE

Solairajan M*

Department of Civil Engineering, Prist University, Puducherry

ARTICLE INFO

Article History:

Received 20th March, 2018

Received in revised form 27th

April, 2018 Accepted 5th May, 2018

Published online 28th June, 2018

Key words:

Concrete Technology, Material Science and Testing, Structural Engineering, Repair Materials and Techniques

ABSTRACT

With the increased incidents of major fires in buildings; assessment, repairs and rehabilitation of fire damaged structures has become a topical interest. This is a specialized field involves expertise in many areas like concrete technology, material science and testing, structural engineering, repair materials and techniques etc. Research and developmental efforts are being carried out in this area and other related disciplines. In this topic the experience of real life problems are presented which add immense value to this. This topic also gives a comprehensive knowledge on the overall strategy for the restoration of fire damaged buildings and also presents a critical appraisal of the assessment procedures by different non destructive techniques, specifications and execution of repair techniques.

The experimentation has been done to find out the impact of the fire on reinforcement steel bars by heating the bars to 100°, 300°, 600°, 900° centigrade of 6 samples each. The heated samples are rapidly cooled by quenching in water and normally by air cooling. The change in the mechanical properties are studied using universal testing machine (UTM) and the microscopic study of grain size and grain structure is studied by scanning electron microscope (SEM).

The general conclusion is that majority of fire damaged RCC structures are repairable. But the impact of elevated temperature above 900°C on the reinforcement bars was observed that there is significant reduction in ductility when rapidly cooled by quenching. In the same case when cooled in normal atmospheric conditions the impact of temperature on ductility is not high. By heating the reinforcement bars, the mechanical properties can be changed without varying the chemical composition.

Copyright©2018 Solairajan M. This is an open access article distributed under the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

INTRODUCTION

With the increased incidents of major fires and fire accidents in buildings; assessment, repair and rehabilitation of fire damaged structures has become a topical interest. This specialized field involves expertise in many areas like concrete technology, material science and testing, structural engineering, repair materials and techniques etc. Research and development efforts are being carried out in these related disciplines. Any structure can undergo fire accident, but because of this the structure cannot be denied neither abandoned. To make a structure functionally viable after the damage due to fire has become a challenge for the civil engineering community. The problem is where to start and how to proceed. It is vitally important that we create buildings and structures that protect both people and property as effectively as possible.

Annual statistics on losses caused by fires in homes and elsewhere make for some unpleasant readings and sadly through these events we learn more about fire safety design.

We are all aware of the damage that fire can cause in terms of loss of life, homes and livelihoods. The extent of such damage depends on a number of factors such as building design and use, structural performance, fire extinguishing devices and evacuation procedures. Although fire safety standards are written with this express purpose, it is understandably the safety of people that assumes the greater importance. Appropriate design and choice of materials is crucial in ensuring fire safe construction. Codes and regulations on fire safety are updated continually, usually as a result of research and development.

An original method is illustrated for assessing the fire damage to reinforced-concrete buildings by Pietro Croce *et al.* Microstructure of fire damaged concrete is investigated by Wei Lin *et al* [8] by using scanning electron microscope and stereo microscope for the concrete which has been heated to a temperature of 900°C to get the visual information that would

*Corresponding author: **Solairajan M**

Department of Civil Engineering, Prist University, Puducherry

otherwise be impossible to see with the naked eye will help to understand the behavior of concrete in fire. A case of assessment of the structure of Novi Sad Open was presented by R. Folic *et al* [6]. Strength and durability recovery of fire damaged concrete after post-fire-curing was presented by Chi-Sun poon *et al* [5] in 2001. M. A. Riley from Sir William Halcrow & partners Ltd has presented a ape on possible new method for the assessment of fire-damaged concrete [4]. N. R. Short *et al* [2] worked in the area of assessment of fire damaged concrete using color image analysis. The effects of rapid cooling by water quenching on the stiffness properties of fire-damaged concrete was studied by A. Y Nassif *et al* [13] of Lodon University in the year 1999.

Study Area

Introduction

The specimens for testing were Sri TMT bar of 12mm diameter. 54 bars were cut to 40 cm size. 6 Specimens were tested for the mechanical properties using UTM before heating at normal temperature and the properties were tabulated. 12 specimens each were heated in the electrical furnace at 100°, 300°, 600° and 900°C for an hour without any disturbance. After heating, out of 12 specimens for each temperature 6 samples were quenched in water for rapid cooling and the other 6 were kept aside for normal cooling at atmospheric temperature. These specimens later were tested for mechanical properties with UTM and microstructure study using SEM.

Equipment

1. Universal Testing Machine
2. Scanning Electron Microscope
3. Electrical Furnace

UTM Testing

The 12mm steel bar is cut to a length of 40 cm and gave a gauge length of 60mm. The specimen is fixed on the machine and the required data on the computer is given. Test is conducted at a load rate of 300 kg/min for all the specimens. An extensometer is fixed to the specimen during the test to read the elongation. The data of the test is noted in computer during the test by default s it is setup. The graph of load versus deformation and load versus elongation is drawn on the computer. After the test all the other parameters like ultimate load, maximum extension in mm, area in mm², ultimate stress, elongation in percent, reduction in in area, young’s modulus, yield stress, .1% and .2% proff stress and many other parameters can be observed.

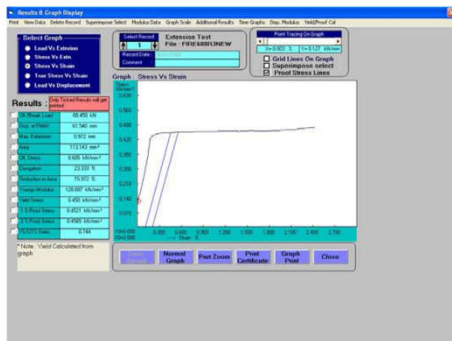


Fig 1 UTM testing setup



Fig 2 Setup of SEM

Tensile testing

Tensile testing is performed in accordance with ASTM D-638 as well as ISO 527 combined tensile and flexural procedure. Tensile properties are the most important single indication of strength in a material. The force needed to pull the specimen apart is determined, along with how much the material stretches before it breaks. The tensile modulus is the ratio of stress to strain below the proportional limit of the material. This is the most useful tensile data as parts should be designed to accommodate stresses to a degree well below it.

SEM

Scanning Electron Microscopy has done by JSM- 6480LV at magnification of 5 microns (x5000) and 10 microns (x1000). The specimens are made in a size of 12mm diameter and 10mm length. Before testing the specimens are to be finely polished in all the edges and neatly cleaned with acetone for the clear view of the grain size and grain structure.

Electric furnace

The electric furnace is used to heat the specimens. The maximum temperature attained in this furnace is 1000°C. The inner depth of the furnace is 45mm. initially the furnace is heated to the required temperature by switching on it and when the required temperature is attained then 6 specimens put inside with the doo closing tightly so that no air enter inside. The specimens are kept for a duration of 1 hour inside the furnace and later 3 specimens are quenched in water for rapid cooling and the other 3 are kept aside for atmospheric time. The 3 specimens which are quenched in water are removed after 15 minutes. Each time 6 bars are kept at temperatures of 100°C, 300°C, 600°C, 900°C and the same is repeated.

RESULTS AND DISCUSSIONS

Results from computerized UTM

Table 2 Properties for ordinary cooling conditions

s.no	Temperature in °C	Ultimate load (kN)	Ultimate stress (kN/mm ²)	Yield stress (kN/mm ²)	Max. extension (mm)	Elongation (%)	.2% proof stress
1	Room temp 27	67.1	0.583	0.466	1.63	28.3	0.465
2	100	66.1	0.584	0.469	1.66	15	0.461
3	300	65.5	0.582	0.451	1.422	30	0.44
4	600	68.4	0.606	0.453	0.972	23.3	0.456
5	900	78.3	0.692	0.469	0.206	11.6	0.534

Table 3 Properties for rapid cooling conditions

s.no	Temperature in °C	Ultimate load (kN)	Ultimate stress (kN/mm ²)	Yield stress (kN/mm ²)	Max. Extension (mm)	Elongation (%)	.2% proof stress (kN/mm ²)
1	27	67.1	0.593	0.466	1.63	28.3	0.465
2	100	66.5	0.588	0.448	1.139	30.2	0.455
3	300	63.7	0.571	0.436	1.12	28.3	0.429
4	600	64.3	0.574	0.484	0.76	27.45	0.449
5	900	65.5	0.585	0.465	0.62	26.6	0.437

For Rapid cooling conditions from table 1

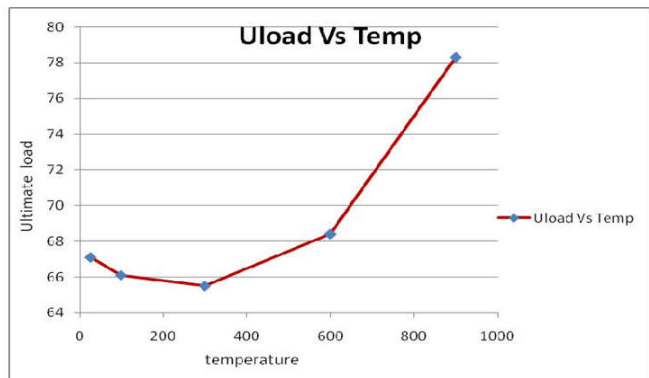


Fig 3 Temperature vs ultimate load

From the graph it can be observed that the ultimate load initially decreases from and then gradually increases, this happens due to the microstructure of the bar. For high temperatures the grain size decreases.

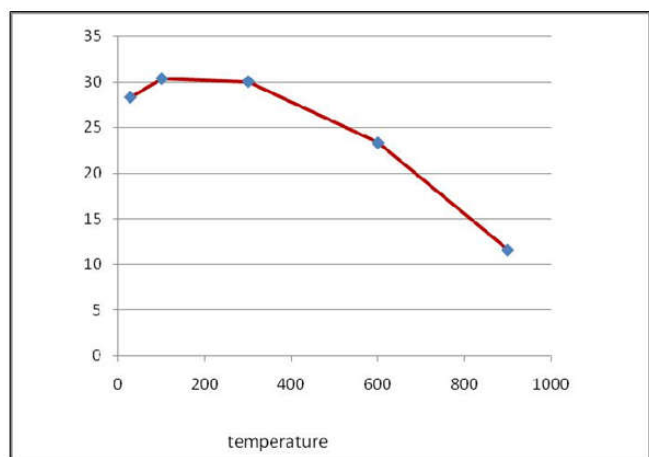


Fig 4 Temperature vs% elongation

temperature vs ultimate stress

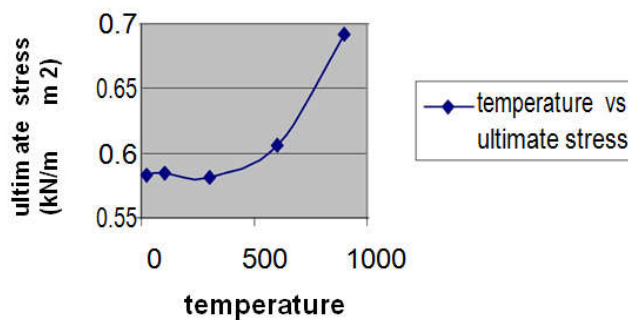


Fig 5 Temperature vs Ultimate stress

Temperature vs .2% Proof Stress

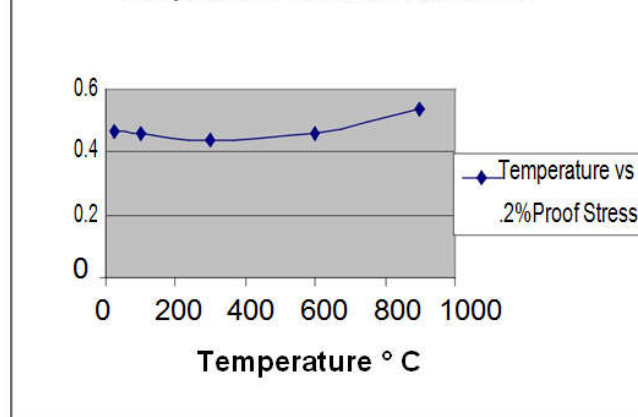


Fig 6 2% Proff stress vs temperature

For ordinary cooling conditions from table 3.2

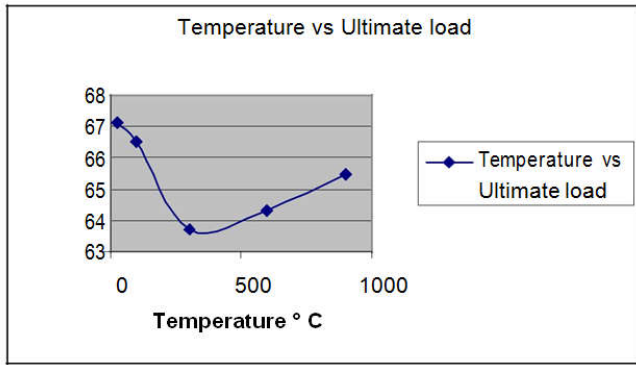


Fig 7 Temperature vs Ultimate load

From the Fig 7, the ultimate load carrying of the specimen was reduced to the specimen before heating.

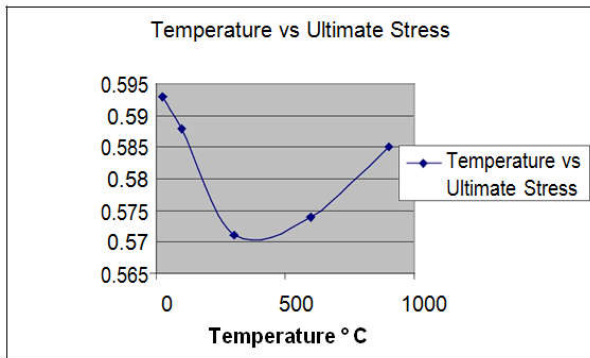


Fig 8 Temperature vs Ultimate stress

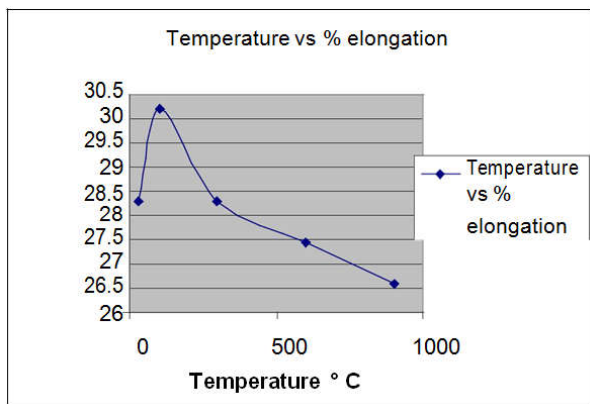


Fig 9 temperature vs elongation

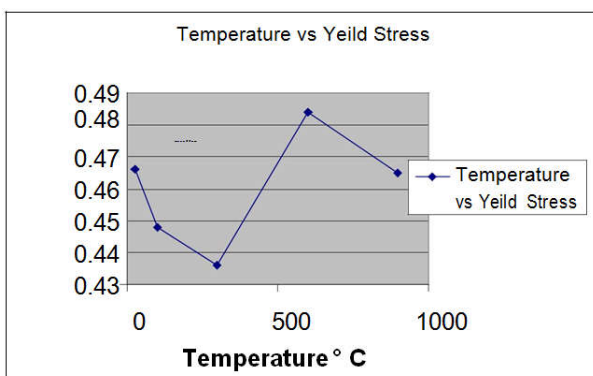


Fig 10 Temperature vs yield Stress

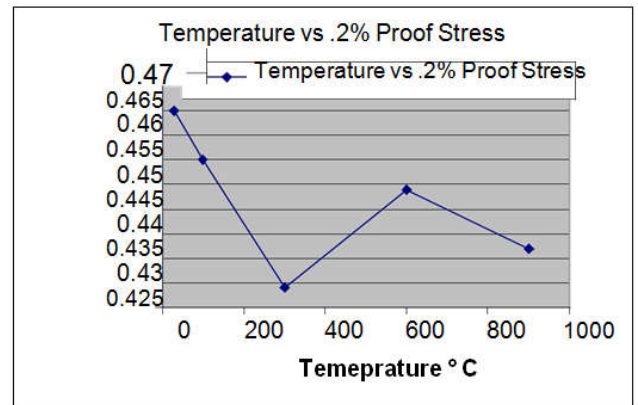


Fig 10 Temperature vs .2% Proof stress

CONCLUSION

1. The impact of fire on the reinforcement bars heated at various temperatures of 100° C, 300° C, 600° C, 900° C, cooled rapidly by quenching in water and normally cooled in the atmospheric temperature were studied and it is observed that the ductility of rapidly cooled bars after heating to high temperature to 900 ° C.
2. Studying the characteristic changes in the mechanical properties of the bars by Tensile strength testing using Universal Testing Machine shows that the increase in ultimate load and decrease in percentage elongation of the specimen which mean that there is significant decrease in ductility of the specimen.
3. Study of micro structure of the bars using Scanning Electron Microscope (SEM) also shows that the microstructure of highly heated specimens varies without varying the chemical composition which would have negative impact on the structure.

References

1. Roberto Felicetti, DIS – Politecnico di Milano, P.za L. da Vinci 32, 20133 Milano, Italy 17 The drilling resistance test for the assessment of fire damaged concrete. April 2006
2. N.R. ShortU, J.A. Purkiss, S.E. Guise School of Engineering and Applied Science, Aston University, Aston Triangle, Birmingham B4 7ET, UK Assessment of fire damaged concrete using colour image analysis. Received 30 August 1999;
3. Roberto Felicetti Department of Structural Engineering (DIS), Politecnico di Milano, Piazza Leonardo da Vinci 32, 20133 Milano, Italy. New NDT techniques for the assessment of fire-damaged concrete structures. Matteo Colombo, September 2006
4. M.A Riley, Msc. Possible new method for the assessment of fire-damaged structures. Sir William halcrow and partners- 1991
5. Chi-Sun poon, Salman Azhar, Mike Anson, Yuk-Lung Wong. Strength and durability recovery of fire-damaged concrete after post-fire-curing. Honkong polytechnic university-2000
6. R.Folic, V.Radojanin, M.Malesev. The assessment of the structure of Novi Sad open University damaged in fire. University of NoviSad, Yugoslavia-2002
7. Jisn-Zuusng Xiao, Jie Li, Zhan-Fei Huang Fire response of high-performance concrete frames and their post-fire seismic performance. ACI

8. Wei-Ming, T.D.Lin, L.J. Powers-Couche. Microstructure of fire-damaged concrete.ACI
9. Dr.A.Kumar, V.Kumar, Behaviour of RCC Beams after Exposure to Elevated Temperatures.
10. Jones, C.D. Repair of fire damaged structures.Source: Elsevier Applied Science Publications, p 237-251, 1986
11. Dorsch, David F. Assessment and repair of fire-damaged concrete structures Source: Innovation in Repair Techniques of Concrete Structures, p 16-26, 1993
12. Sarkar, Alok Source: Restoration of fire damaged structures: A case study Indian Concrete Journal, v 82, n 4, p 17-21, April 2008
13. Nassif, A.Y.; Rigden, S.; Burley, Effects of rapid cooling by water quenching on the stiffness properties of fire-damaged concrete. E- Source: Magazine of Concrete Research, v 51, n 4, p 255-261, August 1999
14. Cooke, R.A. and Rodger, H., Principles of Fire Investigation. 1985. Principles of Fire Investigation. Kent: Institute of Fire Engineers.
15. Chung, J.H., Consolazio, G.R. and Mc Vay, M.C., Finite element stress analysis of a reinforced high-strength concrete column in severe fires. Computers and Structures, 84(21), p.1338-1352. . 2006
16. Concrete and Fire:Using concrete to Achieve safe, efficient buildings and structures. The Concrete Centre, 2004
17. Fletcher, I.A., Borg, A., Hitchen, N. and Welch, S., Performance of concrete in fire: A review of the state of the art, with a case study of the Windsor Tower fire. Proceedings of the 4th International Workshop in Structures in Fire, Averio, Portugal, 10-12 May 2006, p.779-790.037 . 2006.
18. Milke, J., Analytical methods to evaluate fire resistance of structural members. *Journal of Structural Engineering*, 1999.125(10),p.1179-1187.038
19. Khoury, G.A., Effect of fire on concrete and concrete structures. 2000.
20. Effect of fire on concrete and concrete structures. Progress

How to cite this article:

Solairajan M (2018) 'Behaviour of Reinforced Concrete Structures Subjected to Fire', *International Journal of Current Advanced Research*, 07(6), pp. 13718-13722. DOI: <http://dx.doi.org/10.24327/ijcar.2018.13722.2464>
